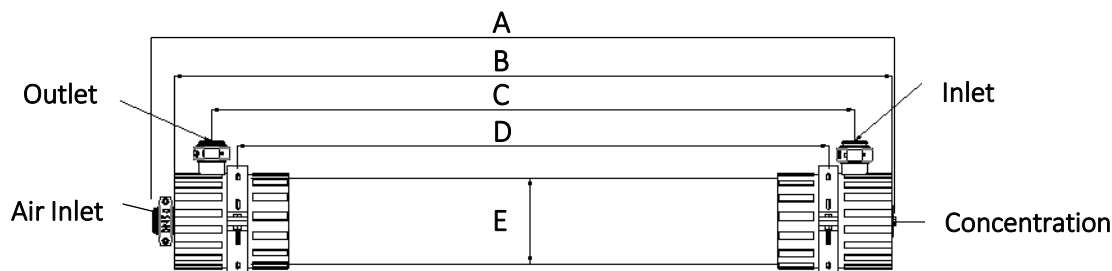


**INNODA™ ESUF-5103****Features****Hollow fiber PVDF membrane**

- Outside-In flow configuration allowing a wide range of solids in the feed water, assisting pretreatment processes and reducing backwash frequency

**Product Specification**

Filament Material	Pore Diameter μm	Membrane Area m ²	Inner Diameter mm	Outer Diameter mm	Housing Material
PVDF	0.03	51	0.7	1.3	UPVC

Dimensions

A inch(mm)	B inch(mm)	C inch(mm)	D inch(mm)	E inch(mm)	Pipe Diameter mm
73.2(1860)	59.1(1500)	64.2(1630)	71.7(1820)	8.9(225)	DN50

Operating Limits

Capacity	2.0-6.9 m ³ /h (based on inlet water quality)
Maximum Inlet Pressure	6.25 bar
Maximum Operating TMP	2.1 bar
Operating Temperature	5-45 °C
pH Range	3-10
pH Range, chemical cleaning	2-12